





BULL BUILDINGS



U-BRACE

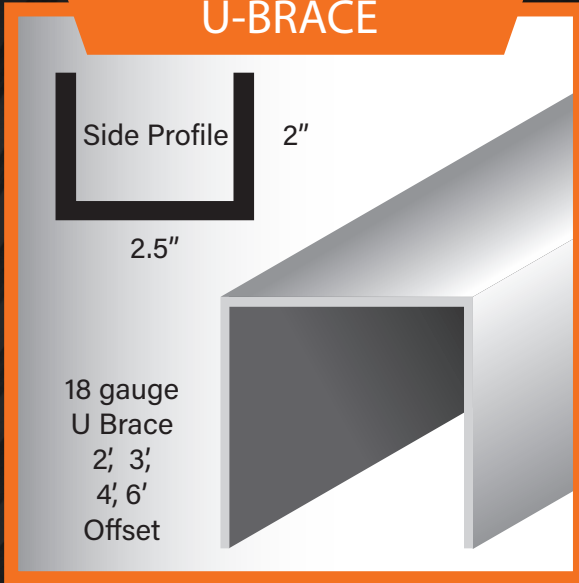

HAT CHANNEL

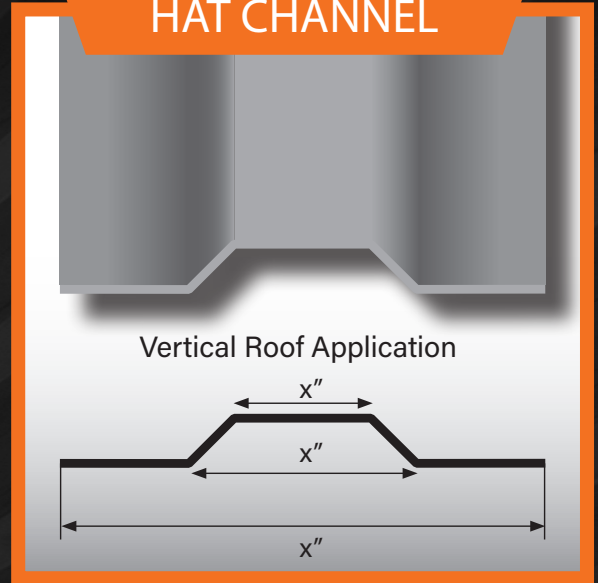

R PANEL PROFILE

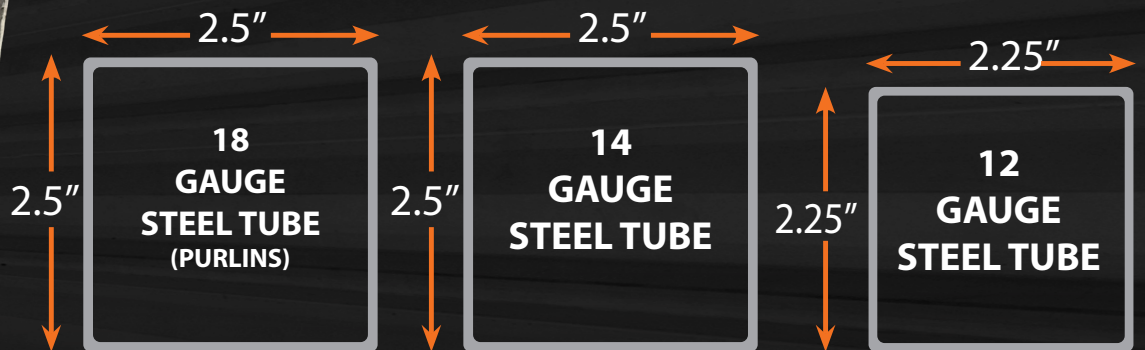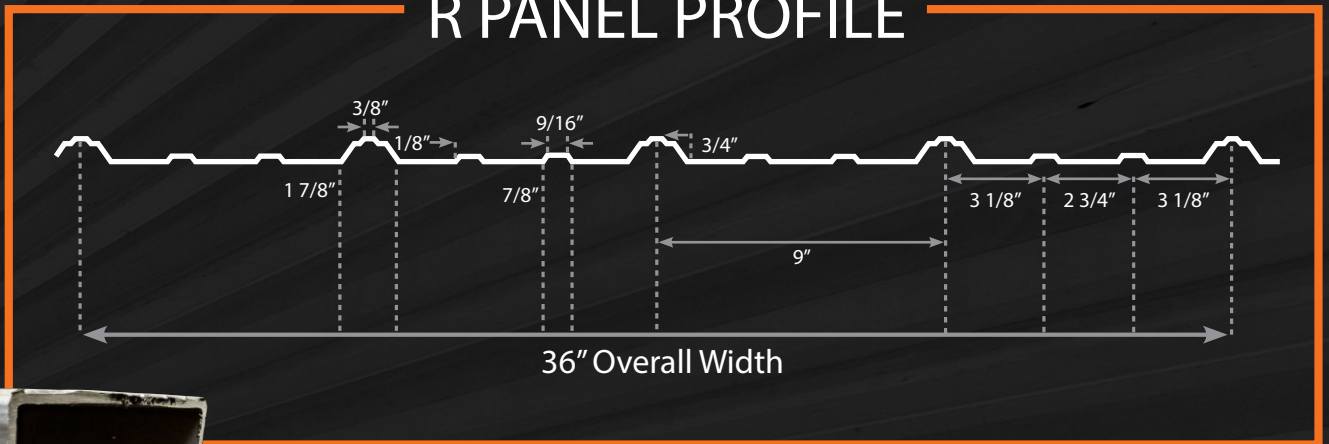

Used in same areas as wall purlin in vertical side wall applications.

Best for 140 mph / 35 psf applications. Utilized in the roof, side wall, end wall, and base rail for 140/35 rated buildings.

Best for 141 mph and higher, snow ratings 36 psf and higher, and all residential/Risk Cat 2/ liveable applications.